

Contents

1. Target group	56
2. Warning and general notices	56
3. Intended application	56
4. Components.....	57
4.1 Rating plates	57
4.2 Coupling devices	58
4.3 Overrun couplings.....	59
4.4 Jockey wheel.....	61
4.5 Drawbar/Towbar.....	62
4.6 Transmission devices.....	63
4.7 Axles.....	63
4.8 Wheel brakes	64
5. Safety.....	65
5.1 General remarks.....	65
5.2 General safety remarks.....	65
6. Commissioning.....	66
6.1 Ball coupling	66
6.2 Overrun couplings	66
6.3 Height adjustable drawbar	67
6.4 Recommissioning the trailer	68
7. Operation.....	69
7.1 Checks before every use	69
7.2 Hitching up	69
7.3 Unhitching	70
7.4 Brakes	71
7.5 Theft protection	72
7.6 Travel	72
7.7 Speed limit 100 (applies only to Germany).....	72
8. Decommissioning/Withdrawal from service	72
9. Inspection.....	73
9.1 Initial inspection	73
9.2 Regular inspection every 5000 km	74
9.3 Recurring general inspection of the trailer	77
9.4 Proof of servicing	78
10. Troubleshooting	79

1. Target group

This User Manual is intended for the end users of ready assembled trailers with integrated KNOTT trailer components.

2. Warning and general notices

DANGER

Draws your attention to a hazardous situation which will result in serious injury or death if not prevented.

WARNING

Draws your attention to a hazardous situation which can result in serious injury or death if not prevented.

CAUTION

Draws your attention to a hazardous situation which can result in minor to moderately severe injury if not prevented.

NOTICE

Draws your attention to possible material damage or other important information in connection with the machine.

3. Intended application

KNOTT trailer components are assembled by a vehicle manufacturer to produce a complete trailer by the addition of attachments which do not form part of the scope of supply. KNOTT trailer components can be used for single or multiple-axle category O1/O2 trailers. The complete trailer requires a General Operating Permit and a certificate of suitability for use on public roads, and must be in compliance with applicable national regulations.

Liability disclaimer

Any other or further-reaching use than that outlined under the "Intended application" above is deemed not in accordance with the prescribed purpose of the equipment. The manufacturer may not be held liable for resulting damages.

The registered trailer may be coupled to vehicles with the relevant towing approval.

DANGER

Danger of accidents due to impaired travel stability of the trailer!

- ▶ Do not travel with a negative vertical load.
- ▶ Adhere to the admissible static vertical load and admissible total weight of all involved components.
- ▶ Utilize the vertical load within the admissible limits.
- ▶ Do not exceed the admissible static vertical load of the towing vehicle.
- ▶ Notes on loading, see 5.2, page 65.


Regular renewal of the General Operating Permit

The trailer is required to pass an official inspection (general inspection) held at regular intervals. For more details, please refer to the applicable national regulations, see als 9.3, page 73.

4. Components

KNOTT chassis comprise the coupling device (ball coupling/towing eyelet), the overrun coupling, the drawbar/towbar, the transmission device, the axles and the wheel brakes.


KNOTT chassis can be supplemented with a wide range of accessories.

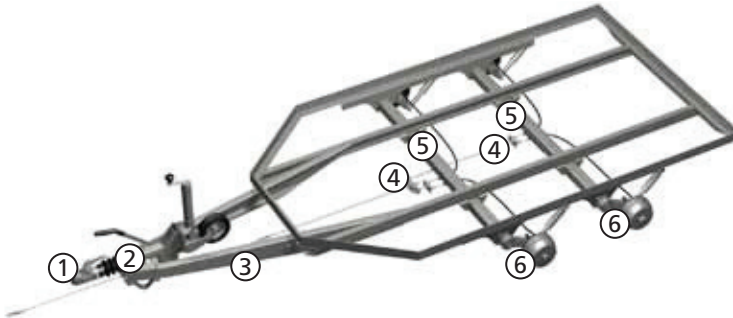

- ① Coupling device (ball coupling, towing eyelet)
- ② Overrun coupling
- ③ Drawbar/towbar
- ④ Transmission device (linkage, brake compensation balance, bowden cables)
- ⑤ Axles
- ⑥ Wheel brakes

4.1 Rating plates

All information contained on the rating plate or optionally on the component is embossed or needle printed.

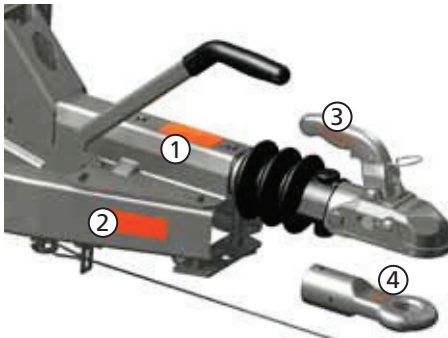

- ① Overrun coupling with coupling device

KNOTT GmbH D-89126 Eggertshausen	
Aufschiebung Typ:	KF27
SS-Protokoll-Nr.:	361-041-62
SS-Protokoll-Nr.:	110040-00
mit Zugverlängerung Typ:	KF27Z
mit Zugverlängerung Typ:	A1 F
mit Zugverlängerung Typ:	1400 1/16 2700 1/16
mit Zugverlängerung Typ:	150 kg D=25 25,0 1/16
mit Zugverlängerung Typ:	150 kg D=25 25,0 1/16
mit Zugverlängerung Typ:	150 kg D=25 25,0 1/16

- ② Towbar (right-hand towbar)


KNOTT GmbH D-89126 Eggertshausen	
Zugverlängerung Typ:	KF27
mit Zugverlängerung Typ:	3000
mit Zugverlängerung Typ:	1 00-0300 1 55R-010300
mit Zugverlängerung Typ:	1 00-0300 1 55R-010300
mit Zugverlängerung Typ:	1 00-0300 1 55R-010300

- ④ Towing eyelet

KNOTT GmbH	
Typ 26 0086 09	
e1 00-0680 S	E1 55R-012026
Dc 30,95 kN S 150 kg	D/Dc 31 kN S 350 kg

- ③ Ball coupling (information on handle or housing)

KNOTT GmbH	
Typ K27 Ausf. A	
e1 00-0507	B50X
D/ Dc 25 kN	S 150 kg



⑤ Wheel brake

KNOTT GmbH
Typ: 20-2425/1
EG-Prof-Nr.: 361-311-83
Gutacht.Nr.: Mchn 83/224
bis 25 km/h : 1360 kg
über 25 km/h : 750 kg / 800 kg



⑥ Axle

KNOTT GmbH Bremsen Achsen D-83125 Eggstätt
Typ VGB13M-27222
AB-Nr.:
Achslast 1350 kg über 25 km/h

4.2 Coupling devices

4.2.1 Ball coupling

Functional characteristics

The ball coupling connects the trailer to the towing vehicle.

Models

Series K

Series AV



- ① Locking and wear display
- ② Handle
- ③ Unlocking the handle

- ④ Protective cover
- ⑤ Lock (theft protector)
- ⑥ Spherical cap (ball hitch)

Admissible pivot ranges

Pivot range around the vehicle's longitudinal axis (roll axis)	max. $\pm 25^\circ$
Pivot range in the horizontal direction (pitch axis)	max. $\pm 20^\circ$
Pivot range around the vertical axis	max. $\pm 90^\circ$

NOTICE

Danger of overloading components and malfunctions!

- The admissible pivot ranges must not be exceeded.
- The admissible static vertical load and the admissible overall weight must not be exceeded.

Theft protector

The theft protector effectively prevents the ball coupling being opened or unauthorized coupling and uncoupling of the trailer.

CAUTION

Danger of crushing fingers due to the spring-loaded closing mechanism of the spherical cap!

- Never reach your fingers into the spherical cap of the ball coupling from below.

4.2.2 Towing eyelet

Functional characteristics

The towing eyelet connects the trailer to the towing vehicle.

Models



DIN towing eyelet



French towing eyelet



NATO towing eyelet


NOTICE

Danger of overloading components and malfunctions!

- The admissible static vertical load and the admissible overall weight must not be exceeded.


4.3 Overrun couplings

Functional characteristics

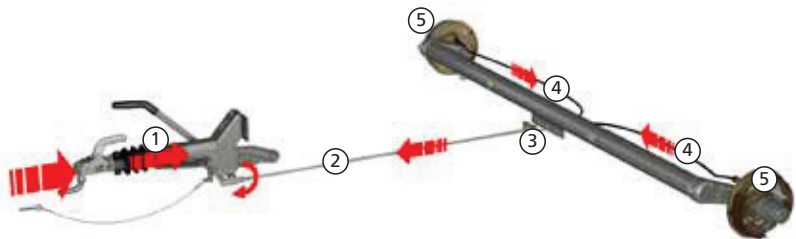

Braking the towing vehicle causes a deceleration force to be exerted on the drawbar. This force pushes in the **drawbar** ① of the overrun coupling. This necessitates overcoming a response threshold in the shock absorber. During this process, the transmission lever is actuated by the drawbar. The **wheel brakes** ⑤ are actuated via the **transmission linkage** ②, the **brake compensation balance** ③ and the **bowden cables** ④.

Overrun coupling components

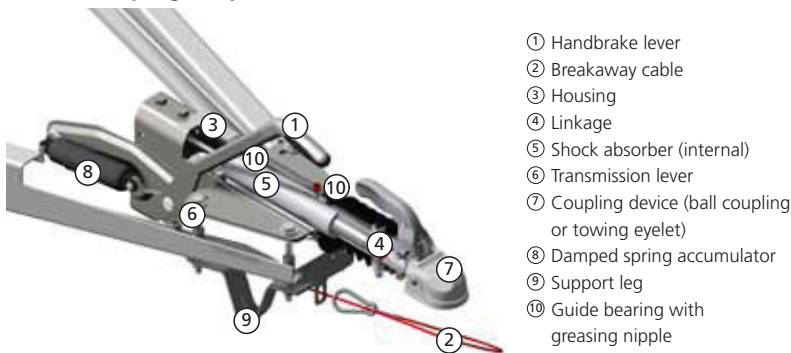

Handbrake (parking brake)

The handbrake permits a secure hold when parked.

Models with automatic reverse

With the handbrake lever actuated, the braking force is maintained by the spring accumulator. The spring forces tension the brake shoe via the brake linkage and the bowden cables and so prevent them from being released. This prevents the wheel brakes from being released if the automatic reverse should release slightly.

Breakaway cable and support leg

The breakaway cable activates the parking brake in the event that the trailer becomes unintentionally detached from the towing vehicle. The support leg prevents the handbrake lever from touching the ground in the event that the trailer is unintentionally lost. This prevents accidental release of the brake.

Series and typical applications

Series	Application
KF and KFG	Mounting on towbars (V drawbar) • KF in sheet metal version up to 3000 kg • KFG as cast version up to 3500 kg
KR/KV	Tubular version up to 3500 kg
KRV	Mounting on a tubular drawbar (as part of the vehicle frame)
KFGL (previously: KFZ)	Application in fifth-wheel trailers on the forked drawbar „KLZ“

Versions of the handbrake lever

	Abbreviation	Property	For series
	GF (GFH, GFV)	Handbrake with damped spring accumulator	All
	HF	Handbrake with toothed segment and spring accumulator	KF, KFG
	KH	Handbrake with spring accumulator	All

4.4 Jockey wheel

Functional characteristics

The jockey wheel is used for supporting and manhandling the trailer after disconnection from the towing vehicle.

NOTICE

Danger of material damage! Do not manhandle the trailer over long distances or drive over any obstacles (such as kerbstones).

Simple jockey wheels are fastened by means of a clamp to the drawbar. The clamp can also be used to fix the height of the jockey wheel. Automatic jockey wheels are hinged downwards when the trailer is hitched to the towing vehicle to allow the jockey wheel to be subsequently cranked downwards and the trailer lifted off the coupling ball. As a safeguard to prevent jockey wheels from working loose, the lower end of the outer pipe is fitted either with a chamfer or two notches into which the inner pipe engages, preventing it from turning.

Models

TK



Standard jockey wheel (adjustment by means of clamp and spindle drive)

ATK



Automatic jockey wheel (rough adjustment using the flap mechanism and spindle drive)

WARNING

Danger of injury caused by dropping drawbar!

If the automatic jockey wheel is lowered too far, the flap mechanism can be triggered, causing the drawbar to drop.



► Only crank up the jockey wheel when coupled to the towing vehicle!



4.5 Drawbar/Towbar

Functional characteristics

The drawbar is a power-transmitting component which links the overrun coupling to the frame of the trailer. If a height-adjustable drawbar is used, the coupling height of the trailer can be adjusted to that of the towing vehicle.

WARNING

Danger of accidents!

No structural changes may be carried out at drawbars/towbars. Drilling work or welding of any kind is prohibited.

Models



V drawbar (towbar)



Height-adjustable drawbar

Height-adjustable drawbars

Model KHV/KHA:



The angle between the drawbar and the adapter can be adjusted from -10° to $+49^\circ$. The face splines are connected by means of a threaded bolt and a lock nut. A lifting and adjusting device can be optionally integrated between the drawbar and the overrun coupling. An integrated gas spring generates an independent lifting force which substantially reduces the degree of force needed for actuation.

Model KHD:



The angle between the drawbar and the adapter can be adjusted from -10° to $+60^\circ$. The adjustable articulated connection between the drawbar and adapter and between the overrun coupling and adapter is formed using a bolt bearing. The position is fixed by a diagonally positioned strut or spindle. The bolt at the spindle which drives the worm must be secured against working loose using a spring clip or splint. The spring clip or splint is connected to the drawing tube by a chain.


4.6 Transmission devices

Functional characteristics

The linkage and bowden cables transmit the tensile forces for braking from the overrun coupling to the wheel brake. The brake compensation balances are required to compensate for different clearances in the wheel brakes and to ensure that the same forces are transmitted to all wheel brakes.


When using a height-adjustable drawbar, the actuating path from the overrun coupling is transmitted to the wheel brakes via a bowden cable and linkage.

Standard model

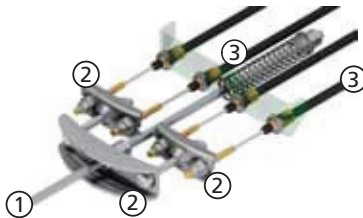


- ① Linkage
- ② Compensation balances (3x)

Optional model

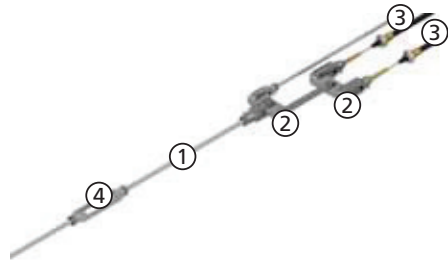

- ③ Bowden cables to the wheel brake
- ④ Turnbuckle

4.7 Axles

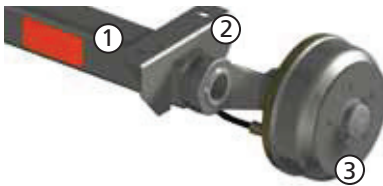

- ① Axle tube
- ② Support trestle / flange plate
- ③ Brake stub axle with wheel connection

Functional characteristics


The axle transmits the suspended weight of the trailer to the wheels, absorbing all occurring forces.

Models

Unbraked axles	Admissible axle load up to max. 750 kg
Braked axles	Admissible axle load up to max. 3500 kg

Series	Description
VG / VGB	Rubber spring axle
GB	Translational torsional suspension axle
DB	Torsion bar spring axle

4.8 Wheel brakes

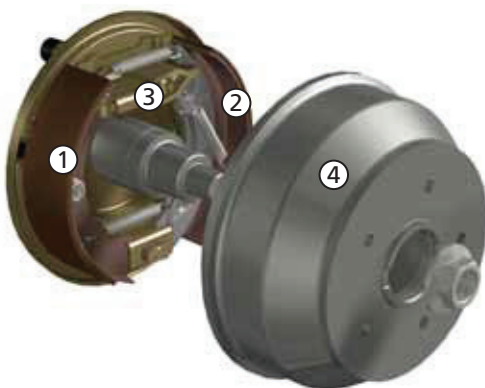

- ① Simplex brake shoe with lining
- ② Backmat brake shoe with lining (with automatic reverse)
- ③ Expanding lock
- ④ Brake drum

Functional characteristics

Mechanical wheel brake

The expanding lock of the mechanical wheel brake is actuated via the transmission device. This causes the brake shoes to be pressed from the inside against the drum. The trailer is braked.

Hydraulic wheel brake

The wheel brake cylinder of the hydraulic wheel brake is actuated using the hydraulic system. This causes the brake shoes to be pressed from the inside against the drum. The trailer is braked. In the hydraulic wheel brake, actuation of the parking brake takes place mechanically by means of the bowden cable.

Automatic reverse (Backmat)

The automatic reverse permits reverse travel without manually applying a block. During reverse travel, a certain residual braking moment has to be overcome.

Automatic adjustment for brakes with automatic reverse

Automatic adjustment compensates for lining wear and so ensures an optimized effect in the long term. Well adjusted brakes enhance ride comfort and also reduce braking distances.

5. Safety

5.1 General remarks

The brake system, the overrun coupling and transmission device, as well as the wheel brakes and the coupling device must be tested in accordance with the relevant EC/ECE directives.

KNOTT ensures that the trailer components are correctly coordinated. They may only be used in the approved combination.

5.2 General safety remarks

! DANGER

Danger of injury in case of failure to observe the following remarks!

- ▶ Adjust your speed to the current driving and road conditions.
- ▶ Adjust your driving speed in accordance with the condition of the road surface and the cargo or loading condition of the trailer, especially when cornering.
- ▶ When parking the trailer, ensure that you have left sufficient clearance. Until the full braking force is applied, the trailer can roll back by 20 to 30 cm.
- ▶ When parking the trailer, secure against rolling using chocks.
[In trailers with overrun brakes:](#) Apply the trailer's handbrake.

For secure loading of the trailer, the following remarks must be observed:

- ▶ Observe the instructions of the trailer manufacturer.
- ▶ Never overload the trailer (avoid overloading the trailer components).
- ▶ Ensure that the trailer is correctly loaded (avoid extreme shifts in the centre of balance caused by incorrect loading).
- ▶ Stow heavy objects close to the axles as low down as possible.
- ▶ Secure the load against falling or being slung out of the trailer.

To ensure personal safety and prevention of injury, observe the following remarks:

- ▶ Trailers may not be used to transport people.
- ▶ During manhandling operations, when hitching and unhitching, never step between the trailer and a fixed standing obstacle.

6. Commissioning

WARNING


Danger of accidents due to faulty or unprofessional work performed at the trailer! Repairs, setting and conversion work may only be performed by an authorized professional workshop in accordance with the KNOTT maintenance manual.

6.1 Ball coupling

Checking the position of the ball coupling

The coupling heights of the towing vehicle and the trailer must coincide:

1. Set the tyre pressure of the trailer to the pressure recommended by the tyre manufacturer.
2. Load the trailer to its maximum admissible overall weight.
3. Hitch up the trailer, see *Hitching up*, page 69

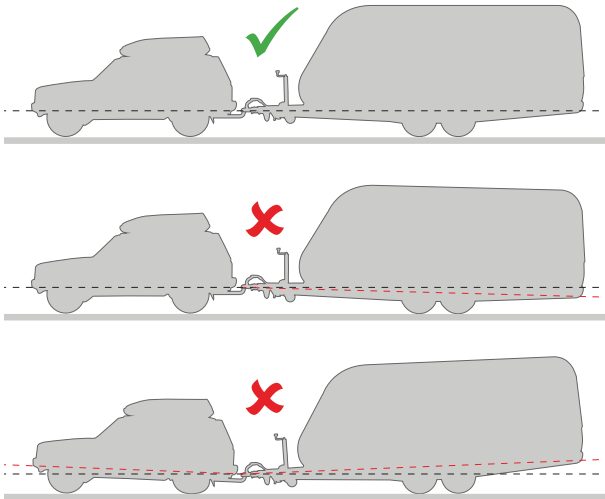

On a level surface without any incline, the coupling heights of the towing vehicle and the trailer must coincide to ensure the optimum driving and braking performance of the trailer.

Lock (theft protector)

Note the key number (for ordering spares if required).

6.2 Overrun couplings

Design of the handbrake lever KH



⚠ DANGER

Danger of injury due to sudden actuation of the brake lever as a result of a pre-tensioned spring!

- The handbrake lever model "KH" is under tension in the released position. Do not remove the red lock screw M10 until the overrun coupling and brake linkage are mounted in the trailer and the complete brake system is adjusted. Before removing the overrun coupling and carrying out any maintenance or repair work or dismantling the brake system, always screw the lock screw back in without fail.

Requirement

- The overrun coupling and brake linkage are mounted in the trailer.
- The complete brake system is correctly adjusted.

Commissioning the overrun coupling

Remove the red lock screw M10 and keep in a safe place.

6.3 Height adjustable drawbar

WARNING

Danger of accidents!


The overrun coupling / coupling device must always be aligned parallel to the drawbar. It is not admissible to drive if the drawbar is not parallel to the overrun coupling.

Setting the height of the drawbar

The clamp nut must be tightened to a prescribed tightening torque in order to ensure a backlash-free torque-transmitting connection:

- 200 Nm with M16 bolt
- 350 Nm with M20 bolt
- 550 Nm with M28 bolt
- 850 Nm with M36 bolt

Model KHV/KHA

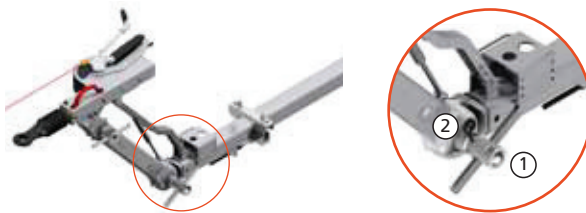

- ① Clamp nuts
- ② Spring clips

1. Pull off the spring clips at the clamp nuts.

NOTICE

Secure the front section against falling out.

2. Unscrew the clamp nuts of the adapters until the teeth are free.
3. Adjust the angular position of the adapter in such a way that the coupling height is reached.
4. To clamp together, tighten the clamp nuts at the face spline.
5. Plug in the spring clips at the clamping nuts in order to secure the nuts against working loose.

Model KHD



1. Pull off the spring clip at the adjusting crank
2. Set the drawbar to the right height using the crank
3. Secure the adjusting crank again with the spring clip.

NOTICE

Danger of overloading

Only actuate the adjusting mechanism when the trailer is uncoupled from the towing vehicle.

NOTICE

Do NOT use the height adjusting mechanism to tilt the loading surface!

6.4 Recommissioning the trailer

Checks after a long period out of use

- Check the general condition
- Check the tyre tread
- Check the air pressure
- Check that the lighting system is in good working order

Ball coupling

Grease all moving parts of the ball coupling - apart from the spherical cap - with standard commercially available machine grease.

7. Operation

7.1 Checks before every use

Before every trip, inspect:

- Tyres: Check the tyre tread and air pressure
- Lighting system: Check for correct function
- Raise the jockey wheel as far as possible and lock. Secure against being lost or working loose. If applicable secure the crank with the spring clip against working loose. The jockey wheel should always be positioned parallel to the direction of travel.
- Lock the ball coupling securely into place
- Suspend the breakaway cable
- Release the parking brake
- Height adjustable coupling device: Check joints for a firm fit, ensure that bolts are securely locked

7.2 Hitching up

1. Open the coupling and place on the coupling ball of the towing vehicle.
2. **For trailers with automatic jockey wheel:** Crank up the jockey wheel. Place the ball coupling over the coupling ball of the towing vehicle. Crank down the jockey wheel until the ball coupling audibly clicks into place.
3. Check the position of the safety display: The pointer must be in the green zone with "+".
WARNING If the pointer is in the red zone with "-", then the coupling has not closed correctly and the trailer must not be driven. The coupling is lying loosely on the ball and could jump apart when pulling away. To ascertain the cause, see *Troubleshooting, page 79*.
4. Test for a correctly engaged ball coupling with a tension test (lifting the coupling).
5. **For trailers with overrun brakes:** Suspend the breakaway cable at the ball neck or on an eyelet on the towing vehicle.
WARNING Danger of injury if the trailer breaks away from the towing vehicle for any reason. Suspend the breakaway cable before every journey.

NOTE

When using a detachable towing fixture on the vehicle, suspend the breakaway cable on the rigid section of the towing fixture. Clip into the eyelet or loop around the bracket and clip in the cable. Ensure that sufficient cable length is left to allow for cornering.

6. Insert the electric plug into the socket of the towing vehicle.
7. **For trailers with jockey wheel:** Completely raise the jockey wheel, tighten the clamp. The breakaway cable must not wind around the jockey wheel.
With automatic jockey wheels: Completely crank up the jockey wheel. While doing so, insert the inner pipe into the twist lock of the outer pipe and tighten. The jockey wheel should always be positioned parallel to the direction of travel.
WARNING Danger of accidents due to unwanted floor contact of the jockey wheel if not completely raised and secured during travel. Before setting off, always ensure that the jockey wheel is secured against being lost or working loose. To do this, crank the jockey wheel completely up and tighten the clamping device.
8. Remove any chocks from under the wheels.
9. **In the case of trailers with overrun brake:** Release the trailer handbrake.

DANGER

Danger of injury and material damage due to incorrectly coupled trailer!

- ▶ After hitching up, always check at the safety display that the coupling is seated correctly on the coupling ball.
- ▶ If the coupling is not correctly closed, the trailer must not be driven.

Safety display



Marking	Coupling position	Handle position	Meaning
	Coupling is open	Handle is pulled up	WARNING The vehicle/trailer combination must NOT be driven.
	Coupling is closed	Handle is in starting position	The vehicle/trailer combination may be driven.
	Faulty condition	Handle is in starting position	WARNING The vehicle/trailer combination must NOT be driven. <i>For causes, see Trouble-shooting, page 79.</i>

NOTICE

The safety display is additionally embossed under the label.

If the label is damaged, the safety display can still be read.

If the label is replaced, the separating lines on the label and embossing must coincide.

7.3 Unhitching

1. **WARNING** Danger of injury caused by uncontrolled rolling of the trailer!

Secure the trailer against rolling away using chocks.

2. *In trailers with overrun brakes:* Tighten the handbrake.
3. Unlock the coupling handle and pull it upwards.
4. *In trailers with jockey wheel:* Crank down the jockey wheel with the coupling handle in the raised position.

WARNING Danger of injury due to tilting trailer! Unhitch trailers with jockey wheel only when the jockey wheel is cranked down.

5. Disconnect the electric plug from the socket of the towing vehicle and insert in the retainer.
6. *In trailers with overrun brakes:* Release the breakaway cable from the towing vehicle and wind around the coupling.
7. *Unhitch the trailer:* Lift the ball coupling off the towing fixture.
In trailers with jockey wheel: Crank down the jockey wheel until the ball coupling is located over the towing fixture.


7.4 Brakes

Service brake

When using braked trailers, when the towing vehicle brakes the trailer is automatically braked at the same time by the overrun coupling.

Handbrake (parking brake)

Model GF

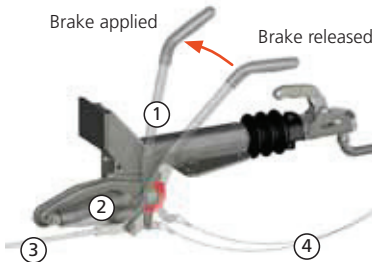

- ① Handbrake lever I
- ② Damped spring accumulator
- ③ Transmission device (brake linkage)
- ④ Breakaway cable

Applying the handbrake

Model GF, GFH, GFV and KH

Pull the handbrake lever over the dead centre. The spring accumulator ensures sufficient tensile stress of the wheel brakes.

Model HF

Pull the handbrake lever until the last ratchet. This is necessary to ensure sufficient travel reserve in the spring accumulator to bridge the automatic reverse.

WARNING

Danger of injury!

If the automatic reverse releases slightly, the spring accumulator automatically tensions the handbrake lever.

- Never reach into the pivot range.

Releasing the handbrake

WARNING

Danger of injury caused by uncontrolled rolling of the trailer!

- Before the handbrake is released, secure the trailer against rolling away using chocks.

Model GF, GFH, GFV and KH

Push the handbrake lever down.

Model HF

Press down the release button at the handbrake lever and press the handbrake lever downwards.

7.5 Theft protection



Requirement:

The ball coupling must be closed. To do this:

- Hitch the ball coupling to the towing vehicle or
- when unhitched, insert coupling ball KSB 50 (or ball with Ø 50 mm).

Locking the ball coupling

1. Insert the key in the lock.
2. Push the key with lock downwards and turn counter clockwise by 90°.
3. Pull out the key.

Open the ball coupling

1. Insert the key in the lock.
2. Turn the key with lock by 90° in the clockwise direction and allow the lock to click into place at the top.

7.6 Travel

7.6.1 Basic rules for safe towing operation.

- Adjust your driving speed in accordance with the condition of the road surface and the cargo or loading condition of the trailer, especially when cornering.
- Drive as smoothly as possible.
- Never overload the trailer (avoid overloading the trailer components).
- Ensure that the trailer is correctly loaded (avoid extreme shifts in the centre of balance caused by incorrect loading).
- Stow heavy objects close to the axles as low down as possible.
- Avoid stress due to impacts or bumps.
- Utilize but at the same time do not exceed the maximum admissible static vertical load of all involved components.

7.7 Speed limit 100 (applies only to Germany)

Under certain conditions, a trailer can be approved for speeds of 100 km/h. In this case, a sign is issued which must be applied on the back of the trailer.

8. Decommissioning/Withdrawal from service

Decommissioning or temporarily withdrawing the trailer from service:

1. Secure the trailer against rolling away using chocks.
2. Release the handbrake.

9. Inspection

To maintain operating and traffic safety, the trailer must be inspected at the following intervals. If used only rarely, the inspections must be carried out at least once a year.

WARNING

Danger of accidents due to faulty or unprofessional work performed at the trailer!


Repairs, setting and conversion work may only be performed by a specialist workshop in accordance with the KNOTT maintenance manual.

Only KNOTT original parts may be used to ensure that

- functional characteristics and safety are guaranteed.
- warranty and guarantee claims do not lose their validity.
- the operating permit remains valid in accordance with national and international regulations.

NOTICE

Jacks may only be positioned under support trestles or at the vehicle frame.

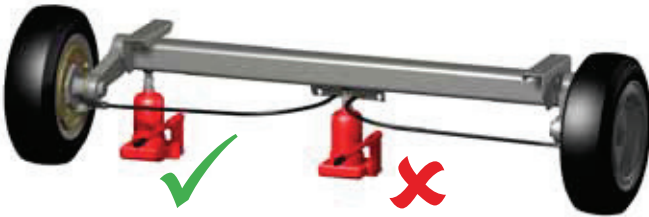

9.1 Initial inspection

9.1.1 Wheel nuts

After the first 50 km or 50 km after a wheel change, the wheel nuts must be checked using a torque spanner to ensure that they comply with the prescribed tensioning torque.

The tightening torque specifications of the rim manufacturer are applicable.

In the absence of any other specifications, this recommendation is applicable:

Wheel nut	Size across flats	Tightening torque
M12x1,5	19 (17)	80-90 Nm
M14x1,5	19	110-120 Nm

Wheel change

Tighten wheel nuts diagonally

⚠ DANGER

Danger of accidents!

Wheel nuts can work loose.

- Only use wheel nuts which are approved by the rim manufacturer.

9.2 Regular inspection every 5000 km

9.2.1 Ball coupling

Check for signs of wear on the coupling ball and ball coupling

1. Hitch the trailer to the towing vehicle.
2. Read the wear condition at the safety display

Marking	Wear condition
+	Wear condition OK
-	Coupling ball or ball coupling are worn

Lubricating moving components

1. Unhitch the trailer from the towing vehicle
2. Lubricate all moving parts of the ball coupling - apart from the spherical cap - with standard customary machine grease.

[When using a stabilization coupling:](#) Do not lubricate either the ball or the spherical cap

Check the diameter of the coupling ball at the towing vehicle

Exchange the towing fixture if

1. the diameter of the coupling ball is less than 49.5 mm or
2. the coupling ball is out of round.

9.2.2 Overrun coupling

Lubrication

1. Relubricate the overrun coupling at both lubricating nipples.
2. Lightly oil all moving parts such as bolts and articulated points of the handbrake lever and the reversing lever.

Readjusting

1. Apply the handbrake.
2. Push the drawbar in over the ball coupling. If the drawbar can be pushed in by more than 45 to 50 mm, have the brake system readjusted by an approved professional workshop.

Checking the function of the overrun damper

1. Unhitch the trailer.
2. Apply the handbrake.
3. Push back the trailer until the handbrake lever is in the end position.
4. Then push the drawbar into the overrun coupling over the ball coupling. The drawbar must return automatically to the zero position. If the return travel takes longer than around 30 seconds, the overrun coupling must be checked in an approved professional workshop.

Checking the spring accumulator at the handbrake lever

1. Carry out a visual inspection for damage (KH and GF) and leaks at the oil damper (GF).
2. Check the handbrake lever for easy running.

9.2.3 Jockey wheel and cable winch

Checking the condition and correct working order

1. Check that the jockey wheel is in correct working order: Check that the crank runs easily and lubricate if necessary.
2. Check that the winch is in correct working order: Check the cable / tape for damage. Exchange if necessary.

9.2.4 Drawbars, side bars and cross bars

Check condition

1. Check for cracks and signs of damage. Exchange damaged / deformed side bars and towbars. Do not attempt to straighten out and reuse.
2. Tighten all screw joints.

Observe specified tightening torques:

- 45 Nm with screw M 10 (8.8)
- 77 Nm with screw M 12 (8.8)
- 115 Nm with screw M 12 (10.9)
- 125 Nm with screw M 14 (8.8)
- 180 Nm with screw M 14 (10.9)
- 190 Nm with screw M 16 (8.8)
- 280 Nm with screw M 16 (10.9)

Height adjustable drawbar

Clean the height adjusting device and lubricate

1. Pull the spring clips out of the clamp nuts.
2. Unscrew the clamp nuts at the face spline until the teeth are free.
3. Clean the tooth system of dirt and fretting rust using a steel brush.
4. Lubricate threaded bolts and articulated joints.

NOTICE

Do not lubricate the tooth system.

5. Tighten the clamp nuts and insert the spring clips. Observe tightening torque levels: see 6.3, *Height adjustable drawbar*, page 67.

9.2.5 Transmission device

1. Check that bowden cables and linkage are running easily.
2. Have any stiff running bowden cables replaced by an approved professional workshop.

9.2.6 Axles

Lubrication

Series	Description	Maintenance
VG / VGB	Rubber spring axle	Maintenance free
GB	Translational torsional suspension axle	
DB	Torsion bar spring axle	Grease at all lubricating nipples.



9.2.7 Wheel brake

Checking the thickness of the brake lining

Brake linings are wearing parts and must be checked at every inspection.

Viewing hole



At every brake

1. Remove the dust cap from the viewing hole on the back of the wheel brake.
2. Check the thickness of the brake lining through the viewing hole: With a minimum lining thickness of 1 mm, have the brake shoe replaced by an approved professional workshop.

NOTICE

Even if one lining is just 1 mm below specified thickness, all brake linings of an axle must be exchanged. In this case, we recommend changing all brake shoes on all axles.

3. Replace the dust caps.

Readjusting the wheel brake

Not required in the case of wheel brakes with automatic adjuster. These are identified by the words "auto adjust" on the dust caps.

Have wheel brakes adjusted by an approved professional workshop.

WARNING

Danger of accidents!

After a brake shoe change, it takes a while for the full braking effect to be reached.

- For the first 100 km, drive with particular care.

9.2.8 Wheel bearings

Checking lateral bearing play

1. Jack up the trailer.
2. Check lateral bearing play. If there is noticeable play, have the trailer checked by an approved professional workshop.

9.2.9 Wheels and tyres

1. Check for signs of ageing, such as cracks and other damage.
2. Test tyre pressure and minimum tread depth in accordance with statutory regulations.
3. Exchange damaged tyres and tyres with a tread below the required minimum.

WARNING

Danger of accidents!

- Following a wheel change, tighten the wheel nuts after around 50 km.

9.2.10 Electrical system

Function testing

1. Connect the plug of the trailer to the socket on the towing vehicle.
2. Check the lighting system functions and replace any defective bulbs.

Check for damage

1. Check plug and cable for damage
2. Check the cable fastenings. Cables must not hang down.
3. Check the lighting system housing/lens for damage.
4. Have damaged plugs, cables and lamp housings replaced by an approved professional workshop.

If the lighting system does not work even though the lamps are in order and following a visual inspection, have the electrical system checked by an approved professional workshop.

9.3 Recurring general inspection of the trailer

In accordance with EC law, every vehicle must be cyclically checked for road traffic safety. Observe the legal road safety regulations applicable in your country.

In accordance with the legal requirements, the trailer must be presented for a general inspection to an approved test centre.

9.4 Proof of servicing

Initial inspection

Date:

Stamp:

Inspection every 5000 km
or yearly

Date:

Stamp:

Inspection every 5000 km
or yearly

Date:

Stamp:

Inspection every 5000 km
or yearly

Date:

Stamp:

Inspection every 5000 km
or yearly

Date:

Stamp:

Inspection every 5000 km
or yearly

Date:

Stamp:

10. Troubleshooting

Faults and their remedy

Fault	Cause	Remedy
Insufficient braking effect	Excessive backlash in the brake system	Only by an approved professional workshop
	Brake linings not run in	Carry out around 10 repeated braking processes from medium speed (50 - 60 km/h)
	Brake lining glazed over, oily or damaged	Only by an approved professional workshop
	Overrun coupling is stiff running	Lubricate overrun coupling <i>see 9.2.2, page 74</i>
	Brake linkage jamming or bent	
	Brake bowden cable corroded or bent	
Jerky braking action	Excessive backlash in the brake system	
	Overrun coupling shock absorber defective	
	Backmat brake shoes jamming in the brake shoe holder	
Trailer brakes unevenly on one side	Wheel brakes are working on one side only	
Trailer brakes as soon as the accelerator is released	Overrun coupling shock absorber defective	Only by an approved professional workshop
Reverse travel is heavy going or not possible	Brake system adjusted too tightly	
	Bowden cables pre-tensioned	
	Backmat brake shoes jamming in the brake shoe holder	
Insufficient handbrake action	Incorrect setting	
	Handbrake lever not tightened firmly enough	Tighten handbrake lever as far as possible
Wheel brakes running hot	Incorrect brake system setting	
	Wheel brakes soiled	
	Reversing lever of the overrun coupling is jamming	Only by an approved professional workshop
	Spring accumulator is already pretensioned in zero position	
	Handbrake lever was released only partially or not at all	Set the handbrake lever to the zero position
Ball coupling does not lock into place after lowering on the ball	Internal components soiled	Clean the ball coupling and lubricate, <i>see 9.2.1, page 74</i>
	Ball on the towing vehicle does not fit	Check the diameter of the ball on the towing vehicle, <i>see 9.2.1, page 74</i>